Technical data sheet

Device installation trunking Signa Base 70170

Item number: 6132732





Trunking base of the Signa Base device installation trunking for covered cable routing and device installation in internal areas. The scope of delivery contains two trunking couplings.

Trunking base with base perforation for direct mounting on the wall. Direction changes with the fittings and close the trunking ends with end pieces. Tested according to DIN EN 50085-1 and DIN EN 50085-2-1.



PVC Polyvinylchloride


Master data

| Item number | 6132732 |
|---------------------------------------|------------------------------|
| Description 1 | Device installation trunking |
| Description 2 | SIGNA BASE 70x170 7035 |
| Manufacturer | OBO |
| Colour | Light grey; RAL 7035 |
| Material | Polyvinylchloride |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 156.35 kg |
| Weight unit | kg/100 m |
| CO Footprint (GWP) Cradle-to- Gate | 2,8159 kg COe / 1 Meter |

Technical data sheet

Device installation trunking Signa Base 70170

Item number: 6132732

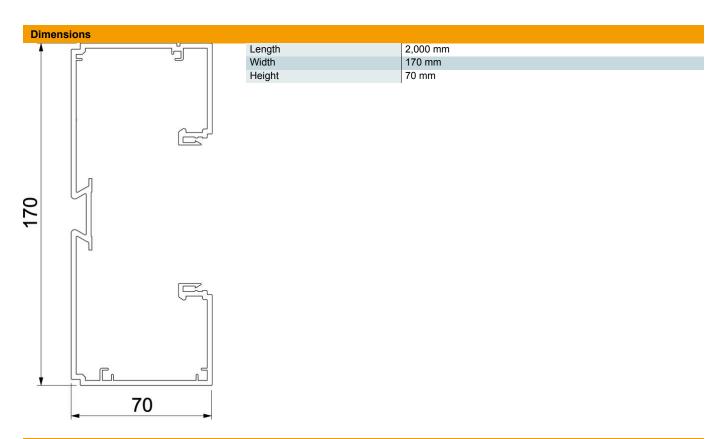

Technical data

| Number of covers | 1 |
|-----------------------------------|-----------------------|
| Number of insertable partitions | 1 |
| Rear panel version (inner side) | Continuous DIN rail |
| Rectangular shape | yes |
| Halogen-free | no |
| Cable retaining clip | yes |
| Duct connector | yes |
| Cover mounting type | Internal |
| Mounting perforation in base | yes |
| Usable cross-section | 10056 mm ² |
| Cover supplied | no |
| Cover width | 79 mm |
| Protection rating | IP40 |
| Protective film | yes |
| Protection rating IK code | IK07. |
| Symmetrical | no |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -5 °C |
| | |