


# Technical data sheet

## MMS-plus SS hexagonal tie, with pressed washer

Item no. 3498159

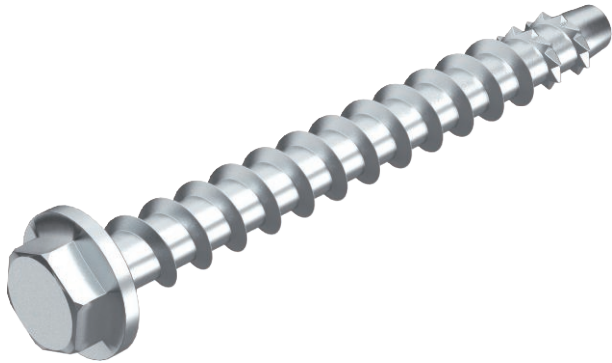

Bolt tie for direct mounting without additional anchors in cracked and uncracked concrete and masonry. With hex head drive and pressed washer to accept large loads. Suitable for fastening suspended loads from suspended supports and wall brackets. Construction product tested according to EAD and CE mark, with European Technical Assessment (ETA) and proof of suitability. Load-bearing capacities under fire loads proven up to fire resistance class R120.




<b>St</b>	Steel
<b>G</b>	Electrogalvanised

### Master data

Item no.	3498159
Type	MMS+ SS 10x100
Description 1	Hexagon head anchor
Description 2	with combined washer
Dimension	10x100mm
Material description	Steel
Material	Steel
Material symbol	St
Interface description	Electrogalvanised
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	25 Piece
Weight	4,80 kg/100 pc.

### Technical data

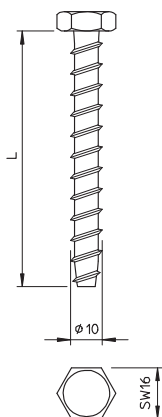

Length	100,00 mm
Dimension L	100,00 mm
WAF	13,00 mm
Dimension	10 x 100 mm
Anchor/nail/bolt version	Spiral anchor
Drill hole diameter	8,00 mm
Anchor length	100,00 mm
Head diameter	19,00 mm
Head shape	Hexagonal
Head shape	Hexagonal
Thread	10
Screw system	Hexagonal
Screw system	Hexagonal