

Technical data sheet

Impact tie, version with collar

Item no. 3492022



Impact tie for single fastening of non-load-bearing systems in non-cracked concrete as well as for multiple fastening in cracked and non-cracked concrete.
Tested to fire protection standards, fire resistance class R 120 according to European Technical Approval ETA-02/0020 (option 7) and European Technical Approval ETA-05/0116.
Mounting with marking and setting tool.




St	Steel
G	Electrogalvanised

Master data

Item no.	3492022
Type	ES M 10x25
Description 1	Drop-in anchor ES
Dimension	10x25
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	50 Piece
Weight	1,40 kg/100 pc.

Technical data

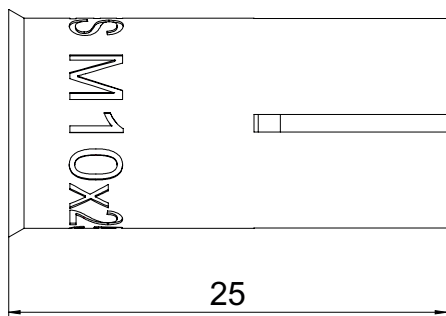

Length	25,00 mm
Dimension L	25,00 mm
Dimension	10x25 mm
Version	Lightning strike
Fastening unit	Other
Drill hole depth	25,00 mm
Drill hole diameter	12,00 mm
Screw-in depth min.-max.	10,00 - 12,00 mm
Thread	M10
Thread metric	10
Self-drilling	<input type="checkbox"/>
Permitted load range, tension zone	2,10 kN
Approvals available	<input checked="" type="checkbox"/>