

# Technical data sheet

## Impact tie, version with collar



Item no. 3492008



Impact tie for single fastening of non-load-bearing systems in non-cracked concrete as well as for multiple fastening in cracked and non-cracked concrete.  
Tested to fire protection standards, fire resistance class R 120 according to European Technical Approval ETA-02/0020 (option 7) and European Technical Approval ETA-05/0116.  
Mounting with marking and setting tool.




**A4** Stainless steel, rustproof

### Master data

Item no.	3492008
Type	ES M 10x40 A4
Description 1	Drop-in anchor ES
Dimension	10x40
Material	Stainless steel, material A4
Material symbol	A4
Smallest sales unit (VG)	50 Piece
Weight	2,00 kg/100 pc.

### Technical data

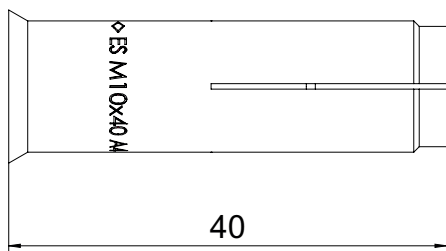

Length	40,00 mm
Dimension L	40,00 mm
Dimension	10x40 mm
Version	Lightning strike
Fastening unit	Other
Drill hole depth	40,00 mm
Drill hole diameter	12,00 mm
Screw-in depth min.-max.	11,00 - 15,00 mm
Thread	M10
Thread metric	10
Self-drilling	<input type="checkbox"/>
Permitted load range, tension zone	2,00 kN
Approvals available	<input checked="" type="checkbox"/>