

Technical data sheet

Cable tray LKS 60 3 m FS

Item number: 6048814



LKS 60 = Light-duty cable tray system with 60 mm side height.
The cable tray is fastened to the bracket with bolts, type FRS M6 x 12.
Magnetic shield insulation without cover 20 dB, with cover 50 dB.



St Steel

FS Strip galvanized

Master data

| | |
|---------------------|------------------|
| Item number | 6048814 |
| Type | LKS 615 3M FS |
| Description 1 | Cable tray LKS |
| Description 2 | perforated |
| Manufacturer | OBO |
| Dimension | 60x150x3050 |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 3 |
| Unit of quantity | Metre |
| Weight | 155.738 kg |
| Weight unit | kg/100 m |


Technical data sheet

Cable tray LKS 60 3 m FS

Item number: 6048814



Dimensions

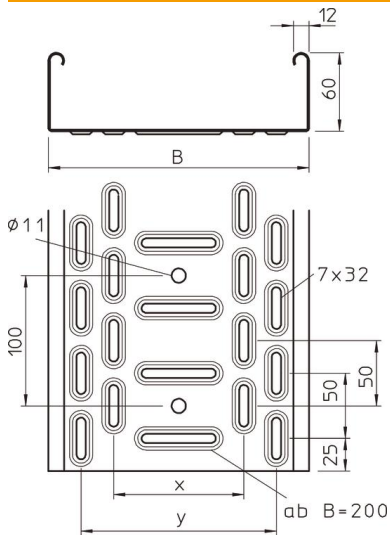

| | |
|-----------------|----------|
| Length | 3,000 mm |
| Width | 150 mm |
| Height | 60 mm |
| Plate thickness | 0.75 mm |
| Dimension B | 150 mm |
| Dimension x | 50 mm |
| Dimension y | 100 mm |

Technical data

| | |
|-----------------------------------------|--------------------|
| Connector version | Without connectors |
| Mounting system fastening type | Floor Ceiling Wall |
| Walkable | no |
| Maintain electrical functions | no |
| With cover | no |
| Mounting perforation in base | yes |
| NATO hole pattern | no |
| Usable cross-section | 88 cm ² |
| Rustproof steel, pickled | no |
| Side perforation | yes |
| Wide-span version | no |
| Load test type according to IEC 61537 | Type II |
| Type of connector, cable support system | Screwed |

Technical data sheet


Cable tray LKS 60 3 m FS

Item number: 6048814



Loads

| | |
|------------------------|----------|
| Support spacing 1.0 m | 0.6 kN/m |
| Support spacing 1.5 m | 0.5 kN/m |
| Support spacing 1.75 m | 0.4 kN/m |
| Support spacing 2.0 m | 0.3 kN/m |

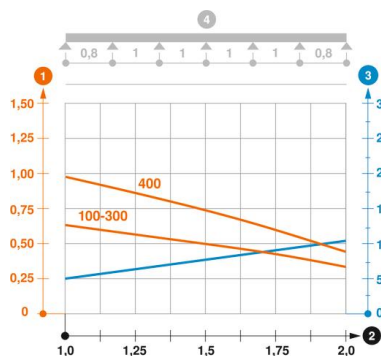

Load diagram, cable tray, type LKS 60

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width