## **Technical data sheet**

## Construction set for 90° angle to right, height 40−150 mm



**Item number: 7423970** 

For the construction-side creation of a trunking junction as a  $90^\circ$  angle, T-piece or crossing. A flushfloor end cover is also required for the creation of a  $90^\circ$  angle (order separately). Suitable for the OKA-G and OKA-W trunking systems.





St

Steel

FS

Strip galvanized

### Master data


| Item number         | 7423970             |  |
|---------------------|---------------------|--|
| Туре                | OKA-G20040150FBR    |  |
| Description 1       | Branch, right       |  |
| Description 2       | for OKA-G and OKA-W |  |
| Manufacturer        | OBO                 |  |
| Material            | Steel               |  |
| Surface             | Strip galvanized    |  |
| Surface standard    | DIN EN 10346        |  |
| Smallest sales unit | 1                   |  |
| Unit of quantity    | Piece               |  |
| Weight              | 49.8 kg             |  |
| Weight unit         | kg/100 pc.          |  |

## **Technical data sheet**

Construction set for 90° angle to right, height 40−150 mm



**Item number: 7423970** 

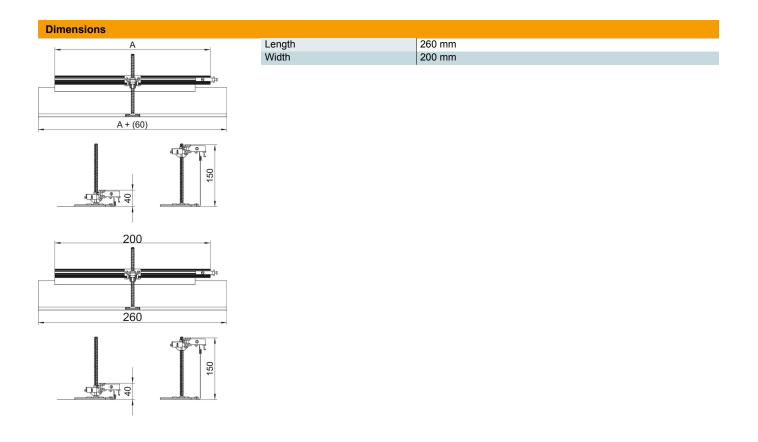

## **Technical data sheet**

# Construction set for 90° angle to right, height 40-150 mm



**Item number: 7423970** 

| Technical data |   |        |
|----------------|---|--------|
| Technical data |   |        |
|                | Mounting opening cover                            | no     |
|                | Floor plate                                       | no     |
|                | Cover fastening, locking                          | no     |
|                | Seal installation option                          | no     |
|                | Installation opening for on-floor tank            | no     |
|                | Decouplable                                       | no     |
|                | Function  | Branch |
|                | Suitable for expansion joint                      | no     |
|                | Suitable for screed-flush closed underfloor ducts | no     |
|                | Suitable for flushfloor, open underfloor trunking | no     |
|                | Suitable for screed-covered underfloor ducts      | no     |
|                | Trunking height, max.                             | 150 mm |
|                | Duct height, min.                                 | 40 mm  |
|                | Minimum screed height                             | 40     |
|                | With connection opening                           | no     |
|                | With equipotential bonding                        | no     |
|                | With separating retainer                          | no     |
|                | With overhang                                     | yes    |
|                | Height-adjustment range, max.                     | 110 mm |
|                | Height-adjustment range, min.                     | 0 mm   |
|                | Removable cover                                   | no     |