Technical data sheet

Construction set for 90° angle to right, height 40-240 mm



Item number: 7423982



For the construction-side creation of a trunking junction as a 90° angle, T-piece or crossing. A flushfloor end cover is also required for the creation of a 90° angle (order separately). Suitable for the OKA-G and OKA-W trunking systems.



St

Steel

FS

Strip galvanized

Master data


| Item number | 7423982 | |
|---------------------|---------------------|--|
| Туре | OKA-G30040240FBR | |
| Description 1 | Branch, right | |
| Description 2 | for OKA-G and OKA-W | |
| Manufacturer | OBO | |
| Material | Steel | |
| Surface | Strip galvanized | |
| Surface standard | DIN EN 10346 | |
| Smallest sales unit | 1 | |
| Unit of quantity | Piece | |
| Weight | 69.7 kg | |
| Weight unit | kg/100 pc. | |

Technical data sheet

Construction set for 90° angle to right, height 40-240 mm



Item number: 7423982

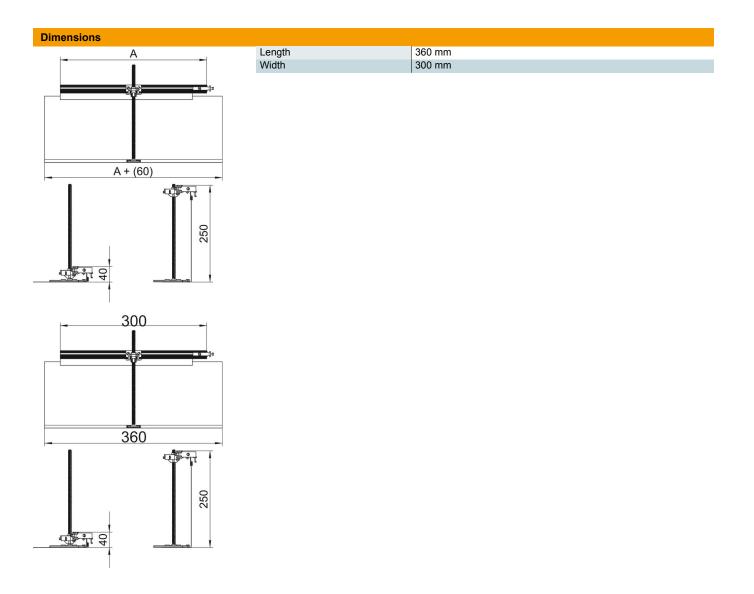

Technical data sheet

Construction set for 90° angle to right, height 40-240 mm



Item number: 7423982

| Technical data | | |
|----------------|---|--------|
| | Mounting opening cover | no |
| | Floor plate | no |
| | Cover fastening, locking | no |
| | Seal installation option | no |
| | Installation opening for on-floor tank | no |
| | Decouplable | no |
| | Function | Branch |
| | Suitable for expansion joint | no |
| | Suitable for screed-flush closed underfloor ducts | no |
| | Suitable for flushfloor, open underfloor trunking | no |
| | Suitable for screed-covered underfloor ducts | no |
| | Trunking height, max. | 240 mm |
| | Duct height, min. | 40 mm |
| | Minimum screed height | 40 |
| | With connection opening | no |
| | With equipotential bonding | no |
| | With separating retainer | no |
| | With overhang | yes |
| | Height-adjustment range, max. | 200 mm |
| | Height-adjustment range, min. | 0 mm |
| | Removable cover | no |