

# Technical data sheet

## Height-adjustable cassette for inspection opening, RKN, stainless steel

Item number: 7408970



"Blank" height-adjustable cassette for the creation of an inspection opening of nominal size 4. Installation of devices in duct systems, raised and cavity floors in interior dry or wet-care floors. Only suitable for smooth floor coverings. For the installation of three UT4 universal supports for nine single devices with support ring/support clamp or 12 Modul 45® devices. 3 APMT5 cover plates can be installed.



A2 Stainless steel

### Master data

|                     |                 |
|---------------------|-----------------|
| Item number         | 7408970         |
| Description 1       | Square cassette |
| Description 2       | Blank lid       |
| Manufacturer        | OBO             |
| Dimension           | 243x243x100     |
| Material            | Stainless steel |
| Smallest sales unit | 1               |
| Unit of quantity    | Piece           |
| Weight              | 360 kg          |
| Weight unit         | kg/100 pc.      |


# Technical data sheet

Height-adjustable cassette for inspection opening, RKN,  
stainless steel

Item number: 7408970



## Dimensions

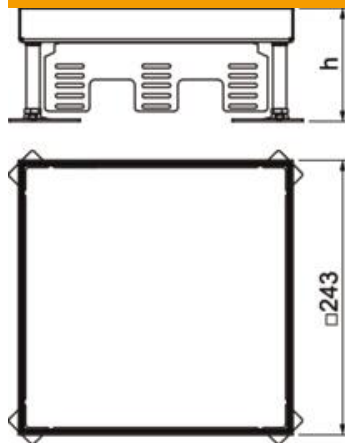

|             |        |
|-------------|--------|
| Length      | 243 mm |
| Width       | 243 mm |
| Height      | 105 mm |
| Dimension h | 105 mm |

## Technical data

|  |                 |
|--|-----------------|
| Number of installable devices              | 0               |
| Number of cable outlets                    | 0               |
| Number of universal supports               | 3 x UT4         |
| Version for                                | Square          |
| Cable outlet version                       | No cable outlet |
| Floor cut-out / Mounting opening           | 244x244         |
| Floor care                                 | Wet             |
| Decouplable                                | no              |
| Floor height, max.                         | 150 mm          |
| Floor height, min.                         | 105 mm          |
| Suitable for raised floor installation     | yes             |
| Suitable for cavity floor installation     | yes             |
| Suitable for underfloor box                | 250/350         |
| Device support to accept mounting boxes    | no              |
| Length of installation dimensions          | 244 mm          |
| Nominal size for device installation units | 9               |
| Height-adjustment range, max.              | 150 mm          |
| Height-adjustment range, min.              | 105 mm          |
| Standard                                   | EN 50085-2-2    |
| Protection rating (IP) when used           | IP00            |
| Protection rating (IP) when unused         | IP55            |
| Protection rating IK code                  | IK10            |
| Heavy-duty version                         | no              |
| Installation system type                   | UT4             |
| Vertical load, large area                  | to 15,000 N     |
| Vertical load, small area                  | to 3,000 N      |
| Approvals                                  | VDE             |
| Floor covering thickness                   | 20 mm           |