### **Technical data sheet**

UDHOME-ONE floor socket, without floor covering recess, single VDE socket, stainless steel Item number: 7368288





Square floor socket for use in dry-care systems and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 75 mm, the height-adjustment range +30 mm. Frame and cover made of stainless steel and visible in the floor covering. Cover with decorative plate. The load-bearing capacity of 15 kN is only guaranteed when in an unused state. A protective contact socket (VDE) is included in the delivery. A data socket can optionally be installed in the data technology plate. When delivered, the item is closed with a blanking plate.




#### Master data

Item number	7368288
Туре	UDHOME-ONE GV V
Description 1	Floor socket
Description 2	with VDE socket
Manufacturer	OBO
Dimension	140x140x75
Material	Stainless steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	220 kg
Weight unit	kg/100 pc.

# **Technical data sheet**

UDHOME-ONE floor socket, without floor covering recess, single VDE socket, stainless steel Item number: 7368288



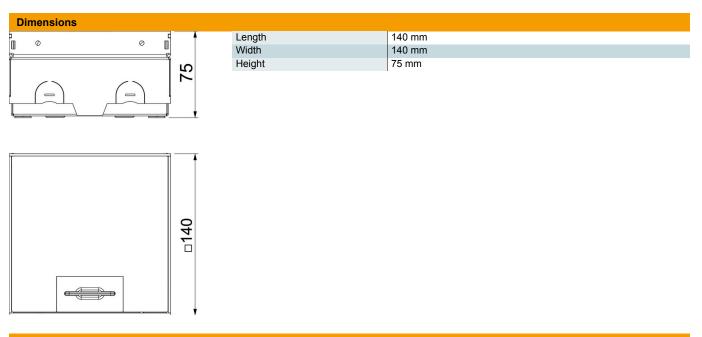

#### **Technical data**

Number of installable devices	2
Number of SCHUKO sockets	1
Version for	Square
Cable outlet version	Swivellable cord outlet
Equipment	Single VDE socket
Floor covering protection frame	no
Floor care	Dry
Cover version	Decorative plate
Seal installation option	no
Application when used	6.101.1 Dry floor care
Application when unused	6.101.1 Dry floor care
Floor height, max.	105 mm
Floor height, min.	75 mm
Suitable for raised floor installati- on	yes
Suitable for screed-flush closed underfloor ducts	no
Suitable for screed-covered un- derfloor ducts	no
Suitable for cavity floor installation	yes
Suitable for wet care	no
Suitable for underfloor ducts	no
Device support to accept moun- ting boxes	no
With floor covering recess	no
Height-adjustment range, max.	105 mm
Height-adjustment range, min.	75 mm
Protection rating (IP) when used	IP20

# **Technical data sheet**

UDHOME-ONE floor socket, without floor covering recess, single VDE socket, stainless steel Item number: 7368288



### Technical data

Protection rating (IP) when unu- sed	IP40
Protection rating IK code	IK10
Heavy-duty version	no
Vertical load, large area	to 15,000 N
Vertical load, small area	to 3,000 N
Approvals	VDE
Opening mechanism	Handle