

Technical data sheet

UDHOME-ONE floor socket, without floor covering recess,
single VDE socket, stainless steel

Item number: 7368288



Square floor socket for use in dry-care systems and screed floors in indoor areas. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 75 mm, the height-adjustment range +30 mm. Frame and cover made of stainless steel and visible in the floor covering. Cover with decorative plate. The load-bearing capacity of 15 kN is only guaranteed when in an unused state. A protective contact socket (VDE) is included in the delivery. A data socket can optionally be installed in the data technology plate. When delivered, the item is closed with a blanking plate.



A2 Stainless steel

Master data


| | |
|---------------------|-----------------|
| Item number | 7368288 |
| Type | UDHOME-ONE GV V |
| Description 1 | Floor socket |
| Description 2 | with VDE socket |
| Manufacturer | OBO |
| Dimension | 140x140x75 |
| Material | Stainless steel |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 220 kg |
| Weight unit | kg/100 pc. |

Technical data sheet


UDHOME-ONE floor socket, without floor covering recess,
single VDE socket, stainless steel
Item number: 7368288



Dimensions

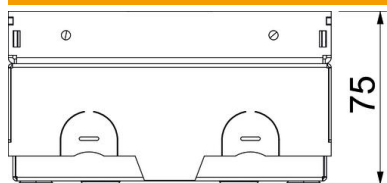

| | |
|--------|--------|
| Length | 140 mm |
| Width | 140 mm |
| Height | 75 mm |

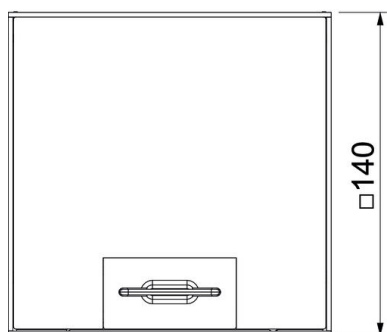

Technical data sheet

UDHOME-ONE floor socket, without floor covering recess,
single VDE socket, stainless steel

Item number: 7368288



Technical data

| | |
|---|-------------------------|
| Number of installable devices | 2 |
| Number of SCHUKO sockets | 1 |
| Version for | Square |
| Cable outlet version | Swivellable cord outlet |
| Equipment | Single VDE socket |
| Floor covering protection frame | no |
| Floor care | Dry |
| Cover version | Decorative plate |
| Seal installation option | no |
| Application when used | 6.101.1 Dry floor care |
| Application when unused | 6.101.1 Dry floor care |
| Floor height, max. | 105 mm |
| Floor height, min. | 75 mm |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | no |
| Suitable for cavity floor installation | yes |
| Suitable for wet care | no |
| Suitable for underfloor ducts | no |
| Device support to accept mounting boxes | no |
| With floor covering recess | no |
| Height-adjustment range, max. | 105 mm |
| Height-adjustment range, min. | 75 mm |
| Protection rating (IP) when used | IP20 |
| Protection rating (IP) when unused | IP40 |
| Protection rating IK code | IK10 |
| Heavy-duty version | no |
| Vertical load, large area | to 15,000 N |
| Vertical load, small area | to 3,000 N |
| Approvals | VDE |
| Opening mechanism | Handle |