# Technical data sheet

## Device installation trunking Signa Base 70130

## Item number: 6132727



Trunking base of the Signa Base device installation trunking for covered cable routing and device installation in internal areas. The scope of delivery contains two trunking couplings.
Trunking base with base perforation for direct mounting on the wall. Direction changes with the fittings and close the trunking ends with end pieces.
Tested according to DIN EN 50085-1 and DIN EN 50085-2-1.
Order the base and cover separately.

PVC Polyvinylchloride

### Master data


| | |
|---|---|
| Item number | 6132727 |
| Type | BRK 70130 lgr |
| Description 1 | Device installation trunking |
| Description 2 | SIGNA BASE 70x130 7035 |
| Manufacturer | OBO |
| Colour | Light grey; RAL 7035 |
| Material | Polyvinylchloride |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 130.35 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 2,6647 kg CO2e / 1 Meter |

# Technical data sheet

## Device installation trunking Signa Base 70130

## Item number: 6132727

### Dimensions

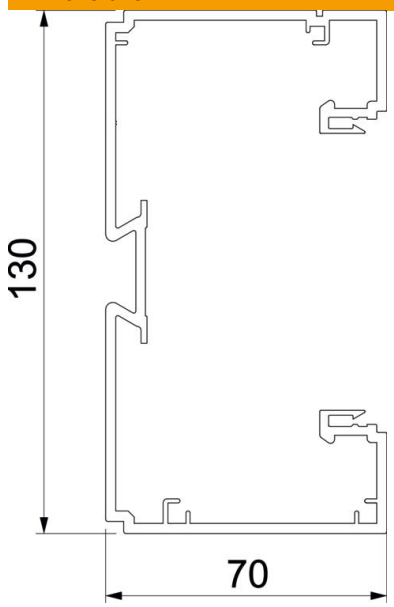


| | |
|---|---|
| Length | 2,000 mm |
| Width | 130 mm |
| Height | 70 mm |

### Technical data

| | |
|---|---|
| Number of covers | 1 |
| Number of insertable partitions | 1 |
| Rear panel version (inner side) | Continuous DIN rail |
| Rectangular shape | yes |
| Halogen-free | no |
| Cable retaining clip | no |
| Duct connector | yes |
| Cover mounting type | Internal |
| Mounting perforation in base | yes |
| Usable cross-section | 7456 mm² |
| Cover supplied | no |
| Cover width | 79 mm |
| ROHS-conformant | yes |
| Protection rating | IP40 |
| Protective film | yes |
| Protection rating IK code | IK07. |
| Symmetrical | no |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -5 °C |