
Technical data sheet

Wiring trunking, type CABLIX 6040 S

Item number: 6132630

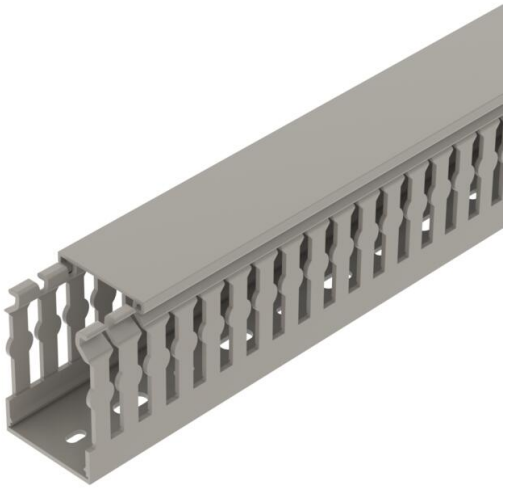

Wiring trunking, incl. cover and base perforation, for horizontal and vertical routing of electrical cables in the switchgear cabinet. Retainers are broken out without tools. Special lengths on request.
Tested to DIN EN 50085-2-3.
Base and cover in set.

PVC Polyvinylchloride

Master data


Item number	6132630
Type	CABLIX 6040 S
Description 1	Slotted cable trunking system
Description 2	CABLIX Set 60x40 7030
Manufacturer	OBO
Colour	Stone grey; RAL 7030
Material	Polyvinylchloride
Smallest sales unit	2
Unit of quantity	Metre
Weight	41.4 kg
Weight unit	kg/100 m

Technical data sheet

Wiring trunking, type CABLIX 6040 S

Item number: 6132630

Dimensions

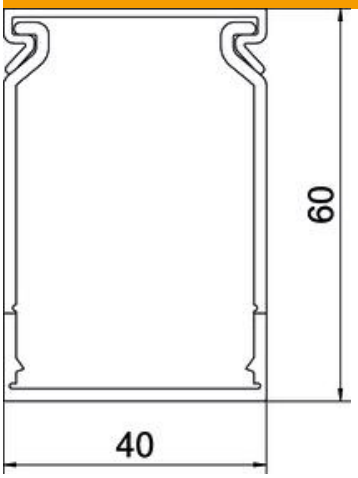

Length	2,000 mm
Width	40 mm
Height	60 mm

Technical data

Side wall version	Slotted
Fastening type	Base perforation
Flexible	no
Halogen-free	no
Creepage current-resistant	yes
With cover	yes
Usable cross-section	19.4 cm²
ROHS-conformant	yes
Slot spacing	6.5 mm
Slot width	6 mm
Self-extinguishing	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C