
# Technical data sheet

## Wiring trunking, type CABLIX 8040 S

## Item number: 6132638

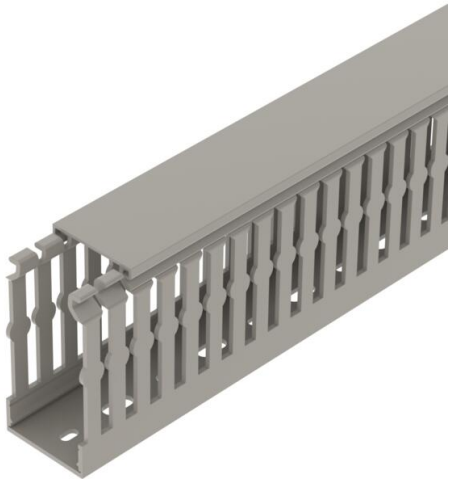

Wiring trunking, incl. cover and base perforation, for horizontal and vertical routing of electrical cables in the switchgear cabinet. Retainers are broken out without tools. Special lengths on request.
Tested to DIN EN 50085-2-3.
Base and cover in set.

PVC Polyvinylchloride

### Master data


| | |
|---|---|
| Item number | 6132638 |
| Type | CABLIX 8040 S |
| Description 1 | Slotted cable trunking system |
| Description 2 | CABLIX Set 80x40 7030 |
| Manufacturer | OBO |
| Colour | Stone grey; RAL 7030 |
| Material | Polyvinylchloride |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 51 kg |
| Weight unit | kg/100 m |

# Technical data sheet

## Wiring trunking, type CABLIX 8040 S

## Item number: 6132638

### Dimensions

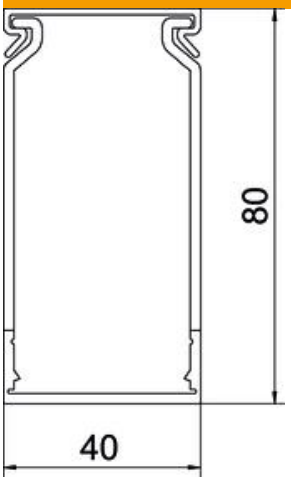


| | |
|---|---|
| Length | 2,000 mm |
| Width | 40 mm |
| Height | 80 mm |

### Technical data

| | |
|---|---|
| Side wall version | Slotted |
| Fastening type | Base perforation |
| Flexible | no |
| Halogen-free | no |
| Creepage current-resistant | yes |
| With cover | yes |
| Usable cross-section | 26.4 cm² |
| ROHS-conformant | yes |
| Slot spacing | 6.5 mm |
| Slot width | 6 mm |
| Self-extinguishing | yes |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -5 °C |