# Technical data sheet

## Flat angle, asymmetrical, rising, for device installation trunking Rapid 80 type GA-A70170
## Item number: 6279423



Rising flat angle to change the direction of the Rapid 80 GA aluminium device installation trunking.

The visible surfaces of the fittings are laminated. The cover must be ordered separately.

Alu Aluminium

EL Anodised


### Master data

| | |
|---|---|
| Item number | 6279423 |
| Type | GA-AFS70170EL |
| Description 1 | Flat angle |
| Description 2 | rising asymmetrical |
| Manufacturer | OBO |
| Dimension | 70x170x300 |
| Colour | aluminium |
| Material | Aluminium |
| Surface | Anodised |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 142.6 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 22,2912 kg CO2e / 1 Piece |

# Technical data sheet

## Flat angle, asymmetrical, rising, for device installation trunking Rapid 80 type GA-A70170
## Item number: 6279423

### Dimensions

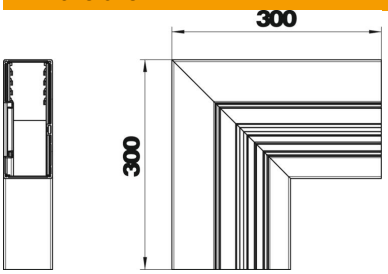


| | |
|---|---|
| Length | 300 mm |
| Width | 170 mm |
| Height | 70 mm |

### Technical data

| | |
|---|---|
| Number of covers | 1 |
| Version for | Base |
| for duct width | 170 mm |
| for trunking height | 70 mm |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | no |
| Cover width | 76.5 mm |
| Change of direction | Vertical rising |
| ROHS-conformant | yes |
| Protection rating | IP30 |
| Protective film | yes |
| Protection rating IK code | IK10 |
| Symmetrical | no |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -25 °C |
| Angle range, min. | 90 mm |