# Technical data sheet

## Internal corner, asymmetrical, for device installation trunking Rapid 80 type GS-A90130
## Item number: 6277540

Internal corner for direct installation on GS device installation trunking.

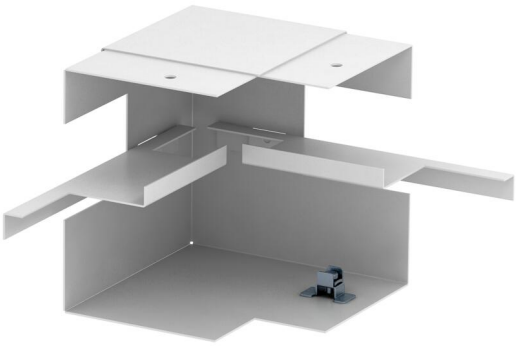

St Steel

**Master data**

| | |
|---|---|
| Item number | 6277540 |
| Type | GS-AI90130RW |
| Description 1 | Internal corner |
| Description 2 | simple, asymmetrical |
| Manufacturer | OBO |
| Dimension | 90x130x148 |
| Colour | Pure white; RAL 9010 |
| Material | Steel |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 77 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,2376 kg CO2e / 1 Piece |

# Technical data sheet

## Internal corner, asymmetrical, for device installation trunking Rapid 80 type GS-A90130
## Item number: 6277540

### Dimensions

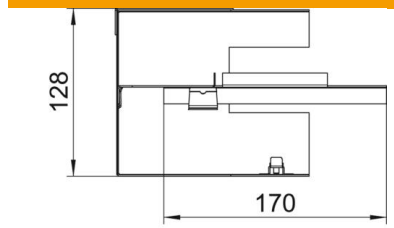


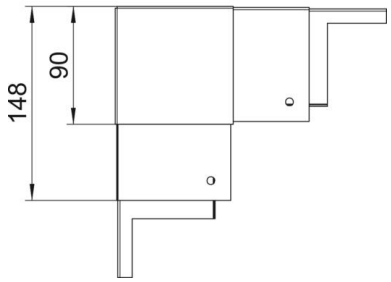


| | |
|---|---|
| Length | 148 mm |
| Width | 130 mm |
| Height | 90 mm |

### Technical data

| | |
|---|---|
| Number of covers | 1 |
| Version for | Base |
| Shape | Asymmetrical |
| for duct dimension | 90 x 130 mm |
| for duct width | 130 mm |
| for trunking height | 90 mm |
| Halogen-free | yes |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | yes |
| Cover width | 76.5 mm |
| Protection rating | IP30 |
| Protective film | yes |
| Protection rating IK code | IK10 |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -25 °C |
| Angle range, min. | 90 mm |