Technical data sheet

Flat angle, symmetrical, for device installation trunking Rapid 80 type GS-S70130
Item number: 6277220

Flat angle for changing the direction of the GS device installation trunking.



St Steel


Master data

Item number	6277220
Type	GS-SFS70130RW
Description 1	Flat angle
Description 2	symmetrical
Manufacturer	OBO
Dimension	70x130x300
Colour	Pure white; RAL 9010
Material	Steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	137 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	6,1362 kg CO2e / 1 Piece

Technical data sheet

Flat angle, symmetrical, for device installation trunking Rapid 80 type GS-S70130
Item number: 6277220

Dimensions

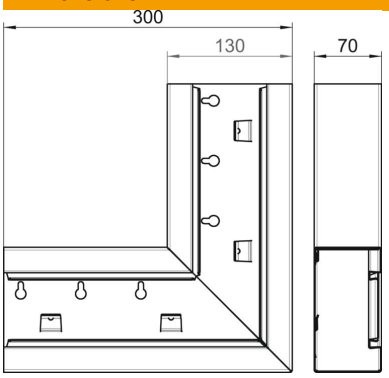

Length	300 mm
Width	130 mm
Height	70 mm

Technical data

Number of covers	1
Version for	Base
for duct width	130 mm
for trunking height	70 mm
Halogen-free	yes
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	yes
Cover width	76.5 mm
Change of direction	Vertical, rising/falling
ROHS-conformant	yes
Protection rating	IP30
Protective film	yes
Protection rating IK code	IK10
Symmetrical	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-25 °C
Angle range, min.	90 mm