# Technical data sheet

## Support plate 3 x type C for mounting support

## Item number: 7407828




Support plate to accept three data connection modules of the following types: Brand-Rex: shielded; EKU: E-Stone; Dätwyler: KS-T, MS-K and KU-T module; R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ; 3M: CAT6 and CAT6A. Dimensions of a mounting opening in mm: 19.30 x 14.80.

A2 Stainless steel

### Master data

| | |
|---|---|
| Item number | 7407828 |
| Type | MTM 3C |
| Description 1 | Support plate |
| Description 2 | with 3x hole pattern Type C |
| Manufacturer | OBO |
| Material | Stainless steel 1.4301 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 3.36 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,2893 kg CO2e / 1 Piece |

### Dimensions

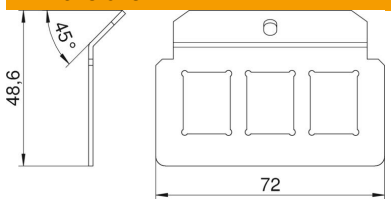


| | |
|---|---|
| Length | 72 mm |

# Technical data sheet

## Support plate 3 x type C for mounting support

## Item number: 7407828

### Technical data

| | |
|---|---|
| Connection options | 3 data connection modules of the following types BTR: E-DAT; Dätwyler: MS and MS-N; Kerpen: VarioKeystone |
| Number of installable devices | 3 |
| Number of strain reliefs | 0 |
| Version for | Support shape |
| Fastening type | Lockable |
| Labelling panel | no |
| Floor covering protection frame | no |
| Floor plate | no |
| Lowerable to be flush-floor | no |
| Seal installation option | no |
| Installation opening for on-floor tank | no |
| Decouplable | no |
| Suitable for raised floor installation | yes |
| Suitable for screed-flush closed underfloor ducts | yes |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for cavity floor installation | yes |
| Suitable for underfloor ducts | yes |
| With floor covering recess | no |
| ROHS-conformant | yes |
| Heavy-duty version | no |
| Depth | 48.6 mm |
| Strain relief option | yes |