
# Technical data sheet

## UDHOME2 floor socket, with tube body, double protective contact socket, stainless steel
## Item number: 7368409

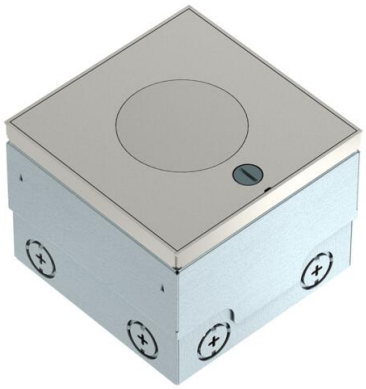

Square floor socket for use in wet-care cavity and screed floors in indoor areas. Cable exit for height-adjustable tube body. Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range is +25 mm.
The scope of delivery contains a double protective contact socket. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.

IP 65

A2 Stainless steel

KGT shot peening


### Master data


| | |
|---|---|
| Item number | 7368409 |
| Type | UDHOME2 VT2 V |
| Description 1 | Floor socket |
| Description 2 | with tube body, double socket |
| Manufacturer | OBO |
| Dimension | 140x140x110 |
| Material | Stainless steel |
| Surface<br>Surface standard | shot peening |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 297 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 16,3743 kg CO2e / 1 Piece |

# Technical data sheet

## UDHOME2 floor socket, with tube body, double protective contact socket, stainless steel
## Item number: 7368409

### Dimensions

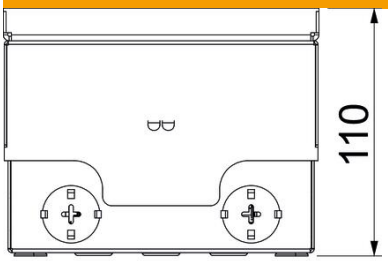

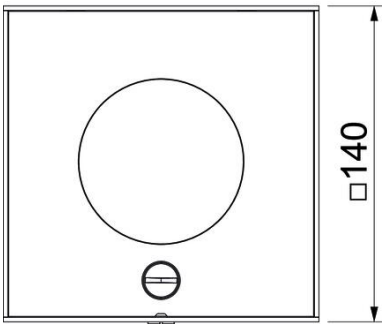
| | |
|---|---|
| Length | 140 mm |
| Width | 140 mm |

### Technical data

| | |
|---|---|
| Number of installable devices | 2 |
| Number of mounting boxes | 1 |
| Cover version | Square |
| Cable outlet version | Lowerable tube body |
| Equipment | Double VDE socket |
| Floor covering protection frame | no |
| Floor care | Wet |
| Cover version | Decorative plate |
| Floor height, max. | 135 mm |
| Floor height, min. | 110 mm |
| Suitable for raised floor installation | no |
| Suitable for cavity floor installation | yes |
| Suitable for wet care | yes |
| Suitable for underfloor ducts | no |
| Length of external dimensions | 140 mm |
| Length of installation dimensions | 140 mm |
| With floor covering recess | no |
| ROHS-conformant | Exempt |
| Protection rating (IP) when used | IP20 |
| Protection rating (IP) when unused | IP65 |
| Protection rating IK code | IK10 |
| Vertical load, large area | to 15,000 N |
| Vertical load, small area | to 3,000 N |

# Technical data sheet

## UDHOME2 floor socket, with tube body, double protective contact socket, stainless steel
## Item number: 7368409

**Technical data**

| | |
|---|---|
| Opening mechanism | Sash lock |