
# Technical data sheet

## UZD250-4 junction and branch box

## Item number: 7410070



Junction and branch box for screed-covered underfloor installation duct with sheet steel side walls. For mounting of installation units in the mounting lid (to be ordered separately). Can be adjusted continuously to a nominal screed height of 120–165 mm using the quick height-adjustment unit. The screed can be worked up to be flush with the screed edge. With an acoustic decoupling option after screed laying, and with system accessories, it can be used for heavy-duty applications. Insertion of cables with the 2-part EÜK duct.

St Steel

FS Strip galvanised

### Master data


| | |
|---|---|
| Item number | 7410070 |
| Type | UZD250-4 120165 |
| Description 1 | Junction and branch box |
| Description 2 | for screed height 120-165 mm |
| Manufacturer | OBO |
| Dimension | 400x380x120 |
| Material | Steel |
| Surface | Strip galvanised |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 477 kg |
| Weight unit | kg/100 pc. |

# Technical data sheet

## UZD250-4 junction and branch box

## Item number: 7410070

### Dimensions

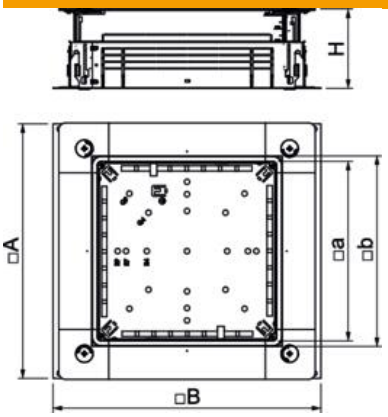


| | |
|---|---|
| Length | 380 mm |
| Width | 400 mm |
| Height | 120 mm |
| Dimension a | 262 mm |
| Dimension A | 380 mm |
| Dimension B | 400 mm |
| Dimension b | 283 mm |

### Technical data

| | |
|---|---|
| Floor plate | yes |
| Cover version | Universal |
| Seal installation option | yes |
| Installation opening for on-floor tank | no |
| Decouplable | yes |
| Screed height, max. | 165 mm |
| Screed height, min. | 120 mm |
| For pipe connection | no |
| Suitable for screed-flush closed underfloor ducts | no |
| Suitable for screed-covered underfloor ducts | yes |
| Suitable for underfloor ducts | yes |
| Trunking width, max. | 250 mm |
| Trunking width, min. | 190 mm |
| Trunking height, max. | 58 mm |
| Duct height, min. | 28 mm |
| Minimum screed height | 80 |
| Nominal size | 250 mm |
| Height-adjustment range, max. | 165 mm |
| Height-adjustment range, min. | 120 mm |
| ROHS-conformant | Exempt |